




Arm9™微控制器，带CAN、LIN和USB

LPC2939FBD208

Last Updated: Apr 8, 2022

LPC2939在单个芯片内结合了ARM968E-S CPU核，2个运行频率高达125 MHz的集成TCM块，全速USB 2.0主机/OTG/设备，CAN和LIN，56 kB SRAM，768 kB flash存储器，外部存储器接口，3个10位ADC以及多个串行和并行接口，针对消费品、工业、医疗和通信市场。为优化系统功耗，LPC2939拥有非常灵活的时钟产生单元 (CGU)，以提供动态的时钟选通及校准。

Block diagram: LPC2939FBD208 Block Diagram

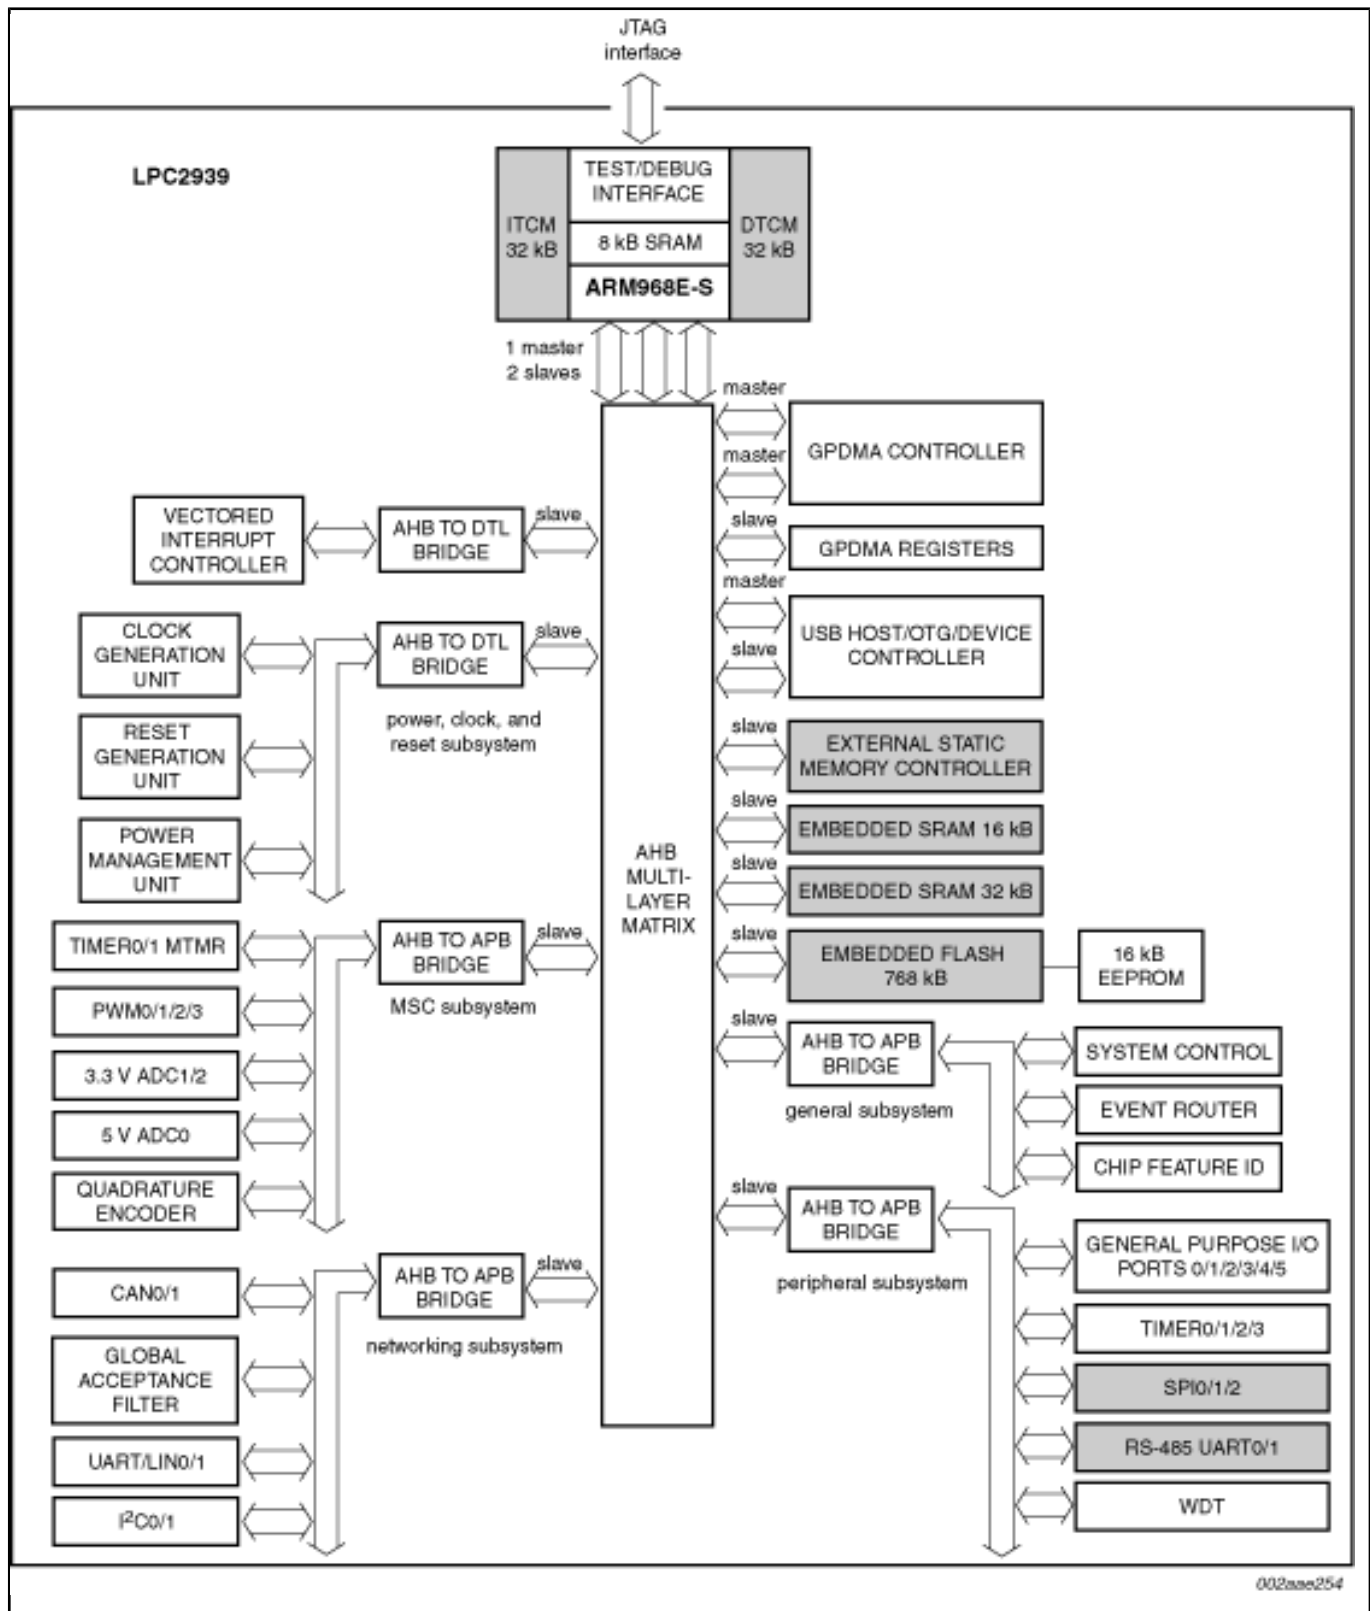

View additional information for [Arm9™ 微控制器](#), 带CAN、LIN和USB.

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.